



Solution for 80-300mm
depth light box and channel letter
5 years warranty




ADM-10722-2835-3W-LET



Features

- Powered by SMD2835 LED
- Aluminum PCB with excellent heat dissipation
- Constant current driver ensuring a string of module working stably
- 50x10 degree beam angle
- 20pcs per series

Dimensions Unit: mm(inch)

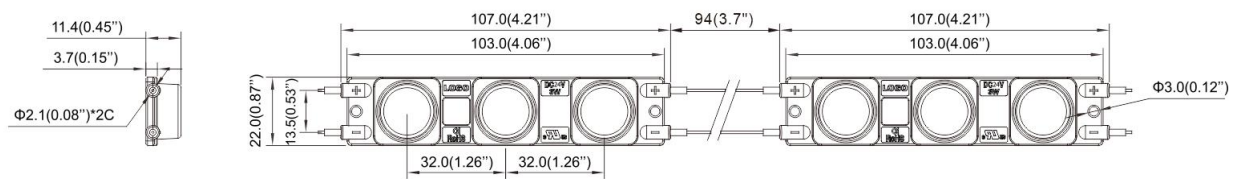


Technical parameters

Item	Parameter	Unit
LED Type	2835 SMD	--
LED Quantity	3	Leds
Power	3	W
Working Voltage	DC12	V
Luminous Flux	450	Lm
Beam Angle	50x10	°
Driving mode	Constant current	--
Dimension	107*22*13.8	mm
Color Temperature	7000	K
Module's Center Dis.	201	mm
Concatenation	20	pcs
IP Rating	IP65	--
Working Temp.	-20~45	°C
Certificates	CE, RoHS, UL	--



Installation

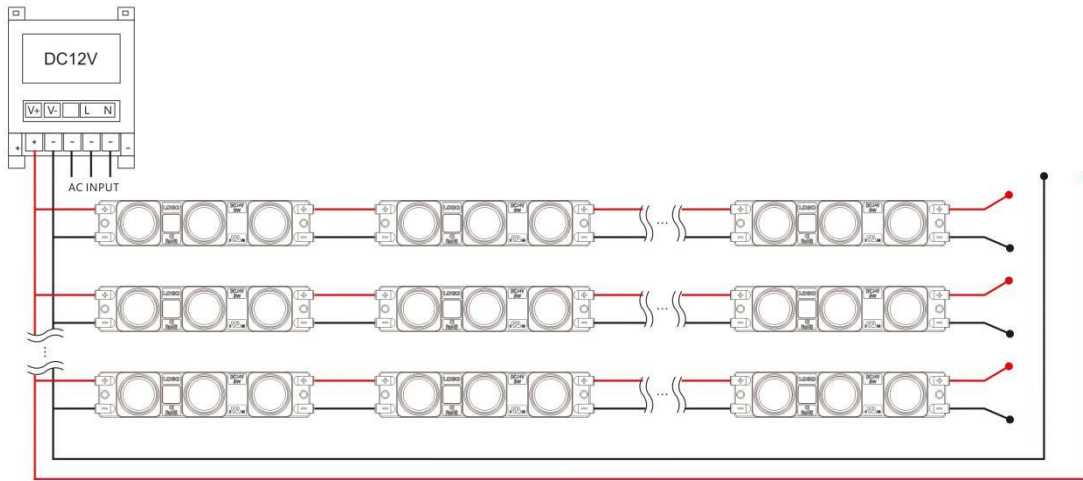

A. Max. number of modules in one chain when the power supplied from single end -20pcs

B. Max. number of modules in one chain when the power supplied from both ends -40pcs

NOTE:

- Incorrect connection may cause short circuit and product failure
- Make sure power supply is unplugged during LED wires connection
- Power supply should be DC12V

Applications

- Internal & external double-sided light boxes
- Medium depth light boxes
- Recommended depth 8-30cm



Add.:F5, Bldg A, Smart Innovation Centre, Hangcheng Industrial Zone, Bao'an District, Shenzhen, China

TEL: +86-755-23359791

E-mail:info@adledlight.com

Web:www.adledlight.com